

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number  
**WO 2004/024298 A1**

- (51) International Patent Classification<sup>7</sup>: **B01D 53/18, 53/14**
- (21) International Application Number: **PCT/FI2002/000701**
- (22) International Filing Date: **30 August 2002 (30.08.2002)**
- (25) Filing Language: **Finnish**
- (26) Publication Language: **English**
- (71) Applicant (for all designated States except US): **KALMARIN TILA [FI/FI]; Vaajakoskentie 104, FIN-41310 Leppävesi (FI).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KALMARI, Erkki [FI/FI]; Vaajakoskentie 104, FIN-41310 Leppävesi (FI).**
- (74) Agent: **BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).**
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **APPARATUS AND METHOD FOR PRESSURISING BIOGAS IN A GAS WASHER**

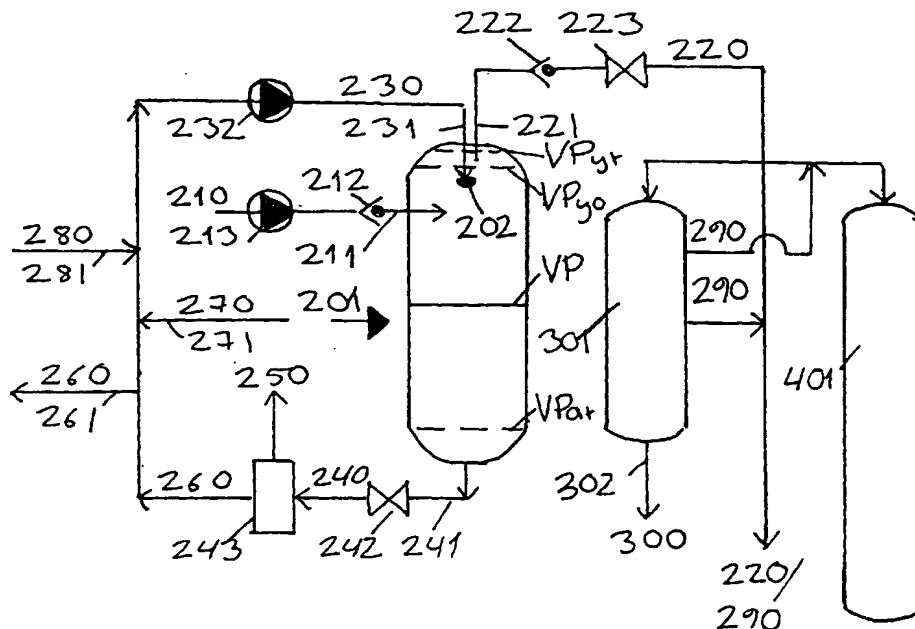

(57) Abstract: The invention relates to a pressurization apparatus (201) for biogas. Said pressurization apparatus (201) comprises a biogas inlet pipe (211) having at least a cut-off means (222, 223), a washing water inlet pipe (231) having at least a washing water pressurization device (232), a washing water outlet pipe (241) having at least a cut-off valve (242), said apparatus being controlled either manually or automatically.